


## DIMENSIONS

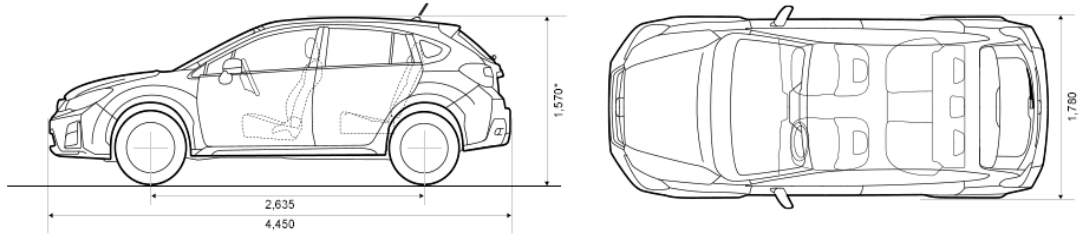

SUBARU XV 2.0i Premium  
(mm)

## SPECIFICATIONS

Item	Symmetrical AWD (All-Wheel Drive)	
	2.0D Premium	
	6MT	
<b>ENGINE</b>		
Type	Horizontally-opposed, 4-cylinder, 4-stroke, turbocharged, diesel engine DOHC 16-valve	
Bore/Stroke (mm)	86 / 86	
Capacity (cc)	1,998	
Compression ratio	15.2	
Fuel system	Common rail	
Fuel tank capacity (lit.)	60	
<b>PERFORMANCE</b>		
Max. output (DIN)(kW(PS)/rpm)	108 (147) / 3,600	
Max. torque (DIN)(Nm(kgfm)/rpm)	350 (35.7) / 1,600 – 2,800	
Max. speed (km/h)	198	
Acceleration (0-100 km/h)(sec.)	9.3	
Fuel consumption <sup>*1</sup>	Urban (lit./100 km)	6.8
	Extra-urban (lit./100 km)	4.6
	Combined (lit./100 km)	5.4
CO <sub>2</sub> emissions <sup>*1</sup>	Urban (g/km)	175
	Extra-urban (g/km)	121
	Combined (g/km)	141
<b>DRIVETRAIN</b>		
All-Wheel Drive type	Centre differential gear coupled with viscous LSD	
<b>DIMENSIONS &amp; WEIGHT</b>		
Overall length (mm)	4,450	
Overall width (mm)	1,780	
Overall height (mm)	1,570	
Wheelbase (mm)	2,635	
Track	Front (mm)	1,525
	Rear (mm)	1,525
Minimum road clearance (at kerb weight)(mm)	220	
Cargo volume <sup>*2</sup> (lit.)	1,270	
Seating capacity (persons)	5	
Kerb weight (kg)	1,445	
Towing capacity (kg)	1,600	
<b>TRANSMISSION</b>		
Gear ratio	D range (Lineartronic)	-
	1st	3.454
	2nd	1.75
	3rd	1.062
	4th	0.785
	5th	0.634
	6th	0.557
Reverse	3.636	
Final drive axle ratio	4.111	
<b>CHASSIS</b>		
Steering	Rack and pinion, electric power steering system	
Suspension (4-wheel independent)	Front	MacPherson strut type
	Rear	Double wishbone type
Minimum turning circle at tyre (radius) (m)	5.3	
	Front	Ventilated disc brakes
	Rear	Disc brakes
Tyre/wheel size	225/55R17, 17 x 7"J	

\*1 Fuel consumption and CO<sub>2</sub> emissions: According to EC715/2007-136/2014W.

\*2 Measured by VDA (V214). Without sunroof.

Vehicle kerb weight varies according to the types of optional equipment included. Specification data and model lineup may vary according to market.